

FEATURES

TP12-2.3 is a general purpose battery with 3~5 years service life under normal float charge at 25°C. TechPower batteries are rechargeable Seal Lead highly efficient, leak proof and maintenance free.





SPECIFICATION

Cell per unit	6	Ambient temperature	
Nominal Voltage (V)	12	Charge : 0°C (32°F) to 40°C (104°F)	
Nominal Capacity (Ah)	2.2Ah @ 20hour rate F.V(1.75/Cell)	Discharge : -15°C (5°F) to 50°C (122°F)	
Weight	Approx.1.05 kg(2.31Lbs.)	Storage : -15°C (5°F) to 40°C (104°F)	
Internal Resistance (1KHz)	37mΩ	Max charge Current	
Max Discharge Current (5s)	44A (5s)	Cycle use : Max charge current : 0.66A	
Battery Life :	Stand by : 3~5 years	Charge voltage: 14.4V to 15.0V	
Terminal Type	F1	Stand by : Charge voltage:13.5V to 13.8V	
Container Material	ABS(Option : 94-HB & 94V-0 flame retardant case)		



DIMENSIONS	Length	Width	Height	Total Height
Unit: mm	178±1	34±1	60±1	66±1
Unit: inch	7.01±0.04	1.34±0.04	2.36±0.04	2.60±0.04

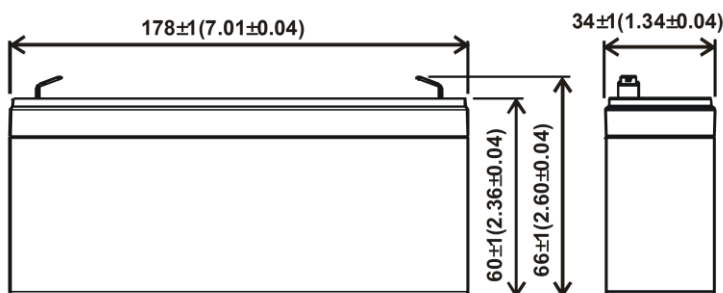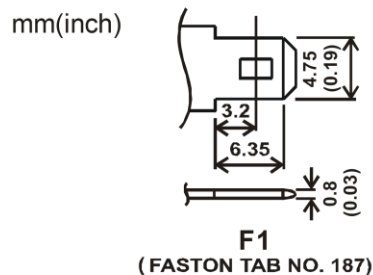

Constant current discharge characteristics Unit:A(25°C 77°F)

F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	9.09	4.67	2.70	1.60	0.83	0.58	0.40	0.26	0.23	0.127
1.67V	8.76	4.52	2.66	1.59	0.82	0.56	0.39	0.24	0.21	0.125
1.70V	8.28	4.42	2.64	1.58	0.80	0.53	0.37	0.22	0.20	0.122
1.75V	7.48	4.19	2.58	1.55	0.76	0.50	0.36	0.21	0.19	0.120
1.80V	6.68	3.95	2.51	1.53	0.72	0.47	0.34	0.19	0.18	0.115

Constant power discharge characteristics Unit:W(25°C 77°F)

F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	99.30	52.70	32.30	19.10	9.97	7.05	5.64	3.19	2.72	1.52
1.67V	96.70	51.20	31.80	18.90	9.91	7.04	5.60	3.17	2.69	1.46
1.70V	90.80	50.50	31.40	18.70	9.89	7.02	5.59	3.16	2.66	1.44
1.75V	85.70	47.90	30.80	18.40	9.73	6.98	5.57	3.15	2.63	1.38
1.80V	76.50	45.20	30.20	18.00	9.60	6.93	5.56	3.14	2.59	1.34